



FD30s FIRE DOORS



FD30s Fire Doors by GAP

GAP's range of fire doors have been fire tested bidirectionally for at least 30 minutes and independently assessed by Certifire (CF5324). The doors are also tested to BS 476 Part 22 and subject to the Q-Mark enhanced security scheme.

In addition to this the door has also been tested by BM Trada to BS EN 1634-3 smoke control test. Each door in the range is manufactured to a high level of security and complies with PAS24 security accreditation. An SBD (Secured by Design) approved upgrade option is also available on selected doors.

FD30s fire doors are available in a variety of styles to suit modern and traditional applications and come in several colour options.



Fire Door Options

7 Door Styles

830 - 1015 825 - 1015 848 - 1015

836 - 1015 500 - 1015

Cill & Threshold Combination	Min Height	Max Height	Min Height* with surface closer
Wheelchair threshold no cill	1983	2093	2025
Wheelchair threshold with cill	2013	2123	2055

Inwards opening only


Accreditations

FD30s

Fire Door with a solid core

Fire tested beyond 30 minutes

Proved to protect against cold smoke ingress

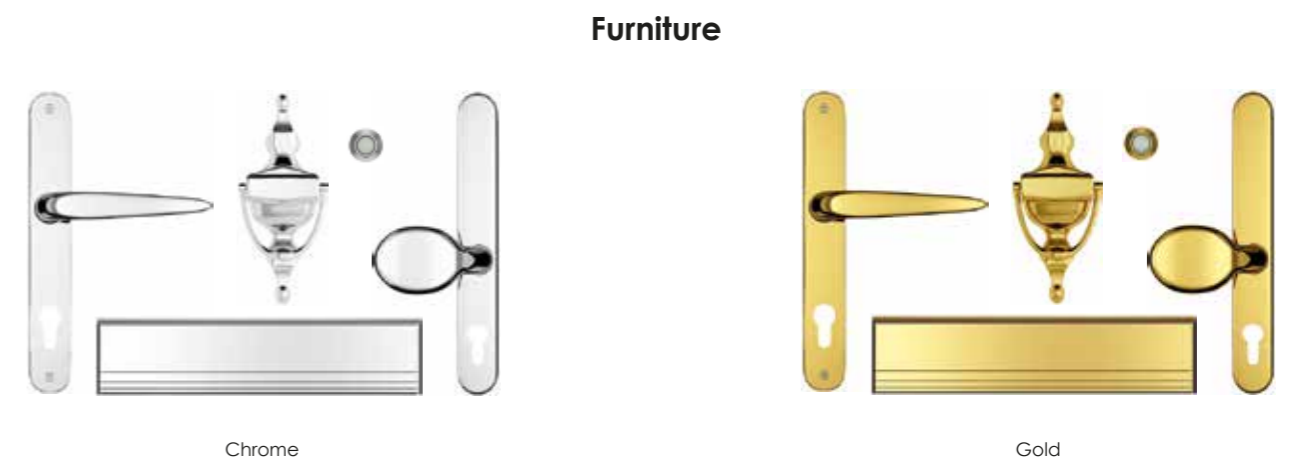

Fire Door Specification

Door construction and certification	GRP solid core re slab tested to BS 476 Part 22 Cold smoke tested BS EN 1634-3: 2004 Certire No CF5324 Secure by Design Part Q compliant BWF ISO 9001: 2008
Locking mechanism	All steel construction GU Furco Slamlock - protected with intumescent
PVC outerframe	Reinforced PVC frame - protected with intumescent
Cill / threshold option	Low level disability access threshold 85 or 150mm PVC cill (30mm upstand)
Glazing cassette	Colour matched cassette
Hardware / Furniture	Certire approved FD30 letter plate (CF219) A metal body eye viewer and glass lens (with supporting test evidence) Trojan surface mounted urn knocker
Hardware colour	Fully suited in gold or chrome
Handle type	Lever/Lever Solid Spindle
Hinge type	3 x CE marked Union Powerload steel butt hinges - protected with intumescent
Weather performance	BS6375
Security rating	PAS24 where a surface mounted closer is fitted Q-Mark accreditation where a surface mounted closer is fitted
Number of keys	3
Glass	7mm Pyrodur re resistant glass tested to BS 476 Part 22
Standard cylinder	Conforms to PAS24: 2016 Anti-bump Complies to Secured by Design Tested to BS EN 1303:2005 Available in nickel and brass
Tolerances	The manufacturing tolerances for composite doors are compliant with the British Standard requirements of +/- 1mm.
Closer	Certire approved closer, Assa Abloy Surface Mounted Closer (CF5098)